



Quality, Reliability, Life

# 4" Submersible Motor Pumpset & Sand Fighter Pump



[www.prakashpump.com](http://www.prakashpump.com)

# 4" Submersible Sand Fighter Pumpset

## Applications

- Ground water supply to waterworks
- Irrigation in horticulture and agriculture
- Ground water lowering
- Pressure boosting
- Water treatment
- Civil and industrial application
- Fire fighting application

## Specifications

- Water temperature : up to 35°C
- Minimum internal diameter of well: 4" ø100mm.
- Power: 0.75 to 5.5Kw, 50Hz
- The solids in the water is less than 0.02% (heavy proportion)
- PH: 6.5-8.0

## Performance Range

- Flow: Up to 24 m<sup>3</sup>/hr
- Head: up to 375m
- Speed: 2900 rpm


## Motor Details

- 2 pole induction motor
- Insulation class-F
- Protection IP-68
- Single phase 230V ± 10%, 50Hz (up to 3HP)
- Three phase 400V ± 10%, 50Hz
- Speed 2900 rpm

## Installation and use

- Pump sizes for connecting to motor according to NEMA standards.
- Delivery Casing with built-in non return valve for stop coming back water.
- Manufactured from corrosion resistant materials for long life impellers, diffuser, and Delivery Casing are S.S.AISI-304.
- Specific impeller material selection ensures optimal performance in sandy bores.
- This type models feature independently floating centrifugal impellers to provide easy starting and long life-automatically adjusting to match pumping conditions for various application.
- High quality shaft bearings providing low friction and high wear resistance.
- Strong stainless steel drive shaft ensures positive impeller drive and longer life.
- Standard 2 pole speed motor (2900rpm) limits internal velocities for longer life.
- Heavy duty stainless steel Inner and outer shell providing protection and accurate alignment of internal components.

**Pump performance table**

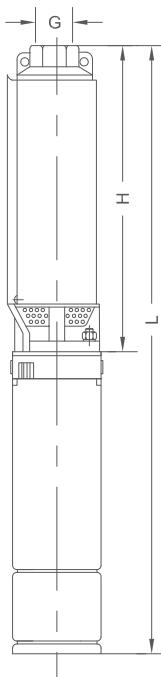

Pumpset Model	Bare Pump Model	KW	HP	OUTLET (INCH)	H (mm)	L (mm)	NET WEIGHT (Kg)		Q	US GPM										
							H	L		0	9	11	12	13	16	18	21	24	26	
							M <sup>3</sup> /H	LPM		0	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	
PMP-R1-88	SSFP6-0.75-88	0.75	1		367	745	3.1	12.1	H Meters	0	9	11	12	13	16	18	21	24	26	
PMP-R1.5-1212	SSFP6-1.1-1212	1.1	1.5	1 1/4"	467	909	4.0	15.0		0	2.1	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	
PMP-R2-1617	SSFP6-1.5-1617	1.5	2		567	1039	4.8	17.2		0	35	40	45	50	60	70	80	90	100	
PMP-R3-2425	SSFP6-2.2-2425	2.2	3		805	1322	6.7	21.5		0	35	40	45	50	60	70	80	90	100	
	SSFP6-4-4444	4.0	5.5	1 1/2"	1305	1907	11.1	30.1		51	47	46	44	43	39	35	30	24	18	
	SSFP6-5.5-5960	5.5	7.5		1756	2502	14.7	42.0		77	72	71	69	68	63	57	49	41	31	
										102	98	96	94	92	86	77	68	57	46	
										151	142	139	136	132	122	111	97	80	62	
										278	265	260	254	247	230	210	187	159	127	
										375	354	347	340	330	310	282	250	210	167	


  

Pumpset Model	Bare Pump Model	KW	HP	OUTLET (INCH)	H (mm)	L (mm)	NET WEIGHT (Kg)		Q	US GPM										
							H	L		0	13	21	24	26	32	37	42	48	53	
							M <sup>3</sup> /H	LPM		0	3.0	4.8	5.4	6.0	7.2	8.4	9.6	10.8	12.0	
PMP-M1.5-68	SSFP12-1.1-68	1.1	1.5		364	806	3.2	14.2	H Meters	0	13	21	24	26	32	37	42	48	53	
PMP-M2-810	SSFP12-1.5-810	1.5	2		426	898	3.7	16.1		0	3.0	4.8	5.4	6.0	7.2	8.4	9.6	10.8	12.0	
PMP-M3-1315	SSFP12-2.2-1315	2.2	3	2"	581	1098	4.9	19.7		0	50	80	90	100	120	140	160	180	200	
	SSFP12-4-2325	4	5.5		929	1531	7.7	16.7		38	36	35	34	33	31	28	24	19	14	
	SSFP12-5.5-3237	5.5	7.5		1208	1954	10.3	37.6		52	50	47	45.5	44	41	37	31	25	18	
									82	78	75	73	71	66	59	50	40	30		
									148	140	134	131	127	118	108	95	79	60		
									202	190	182	178	172	160	143	125	105	80		


  

Bare Pump Model	KW	HP	OUTLET (INCH)	H (mm)	L (mm)	NET WEIGHT (Kg)		Q	US GPM										
						H	L		0	42	53	58	63	69	79	85	95	106	
						M <sup>3</sup> /H	LPM		0	9.6	12.0	13.2	14.4	15.6	18.0	19.2	21.6	24.0	
SSFP24-2.2-8	2.2	3		716	1195	5.3	21.4	H Meters	0	42	53	58	63	69	79	85	95	106	
SSFP24-4-15	4	5.5	2"	1189	1753	8.8	29.6		0	160	200	220	240	260	300	320	360	400	
SSFP24-5.5-20	5.5	7.5		1565	2273	11.9	41.7		49	38	34	32	30	28	23	20	15	9	
									93	73	66	62	59	55	47	43	34	25	
									122	95	86	81	76	72	61	56	44	32	


**HYDRAULIC PERFORMANCE CURVE SSFP6-0.75-88 TO SSFP6-5.5-5960 50Hz 2900 rpm**

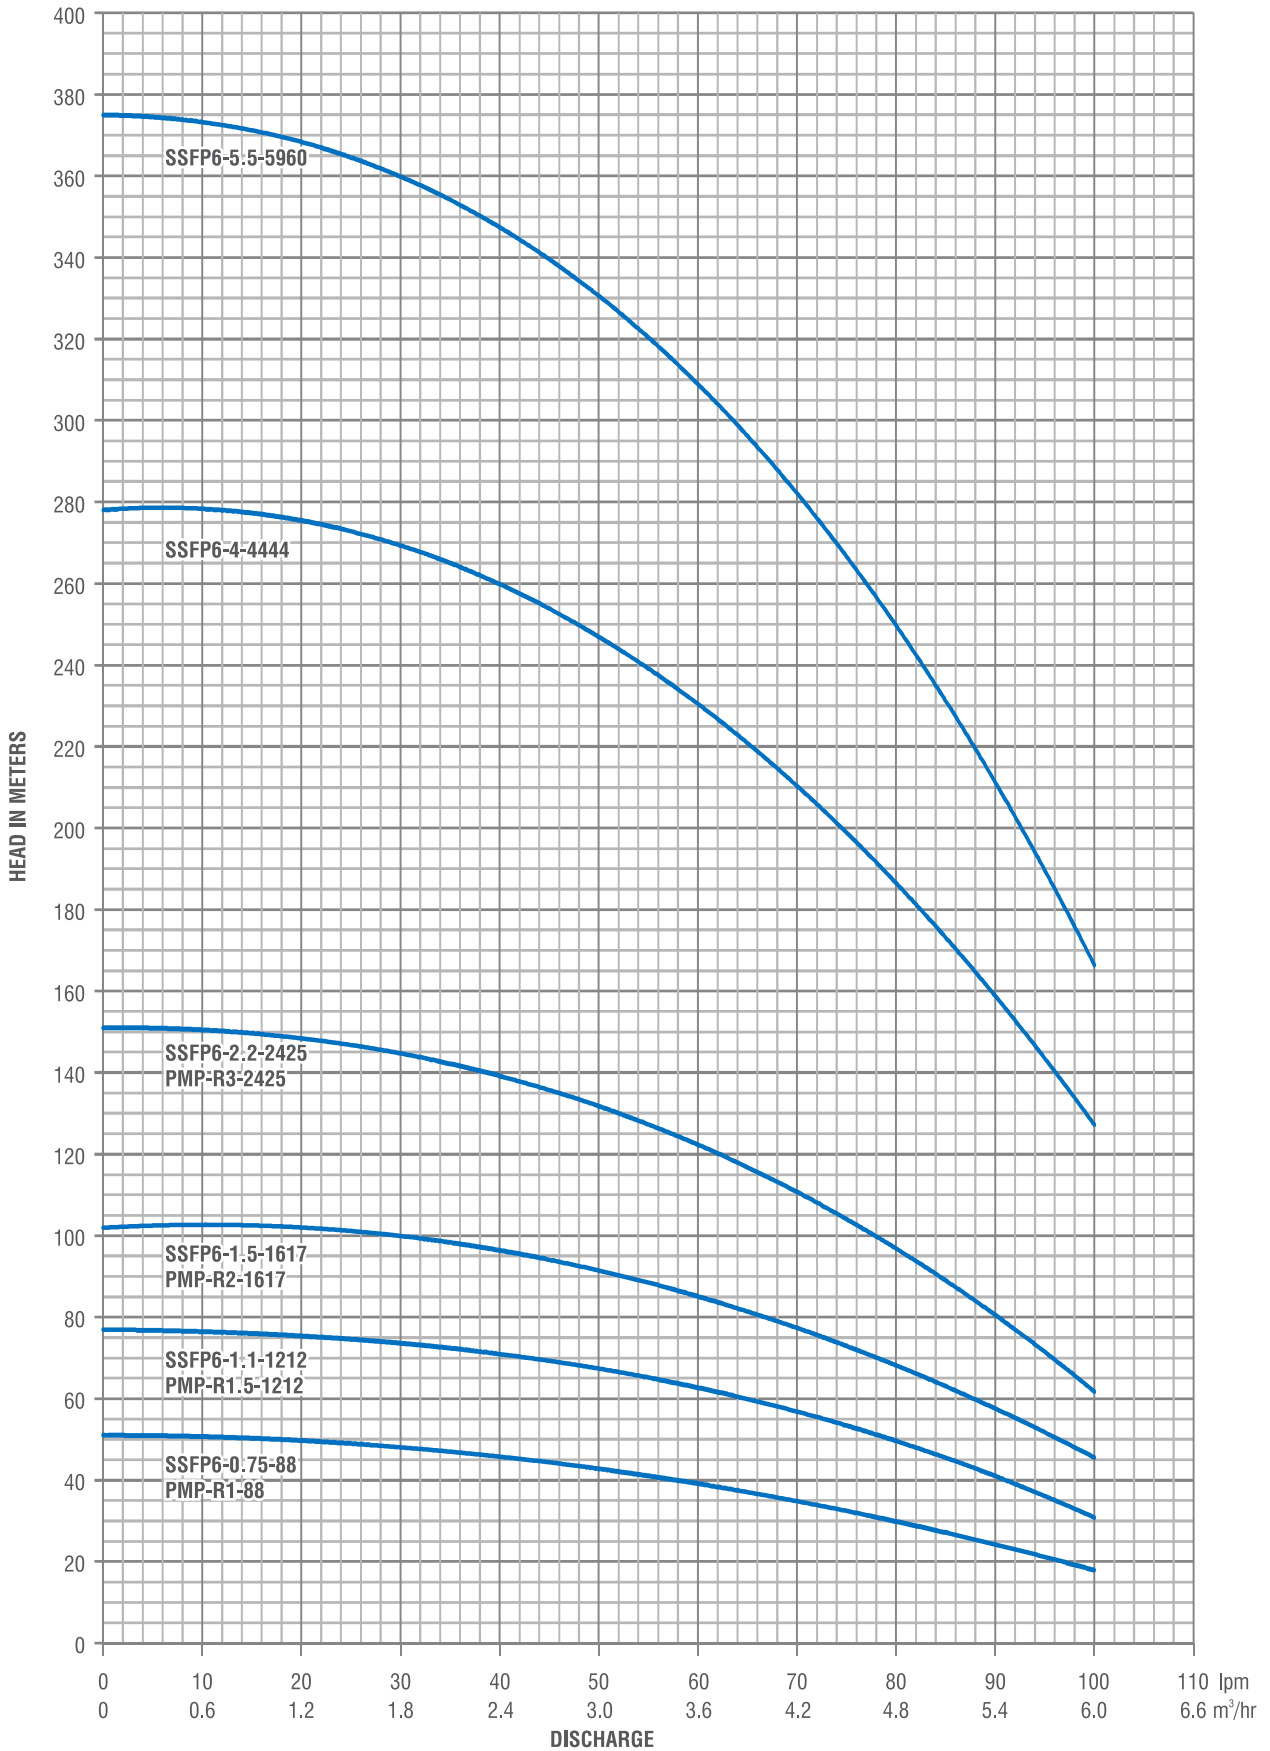

**HYDRAULIC PERFORMANCE CURVE SSFP12-1.1-68 TO SSFP12-5.5-3237 50Hz 2900 rpm**

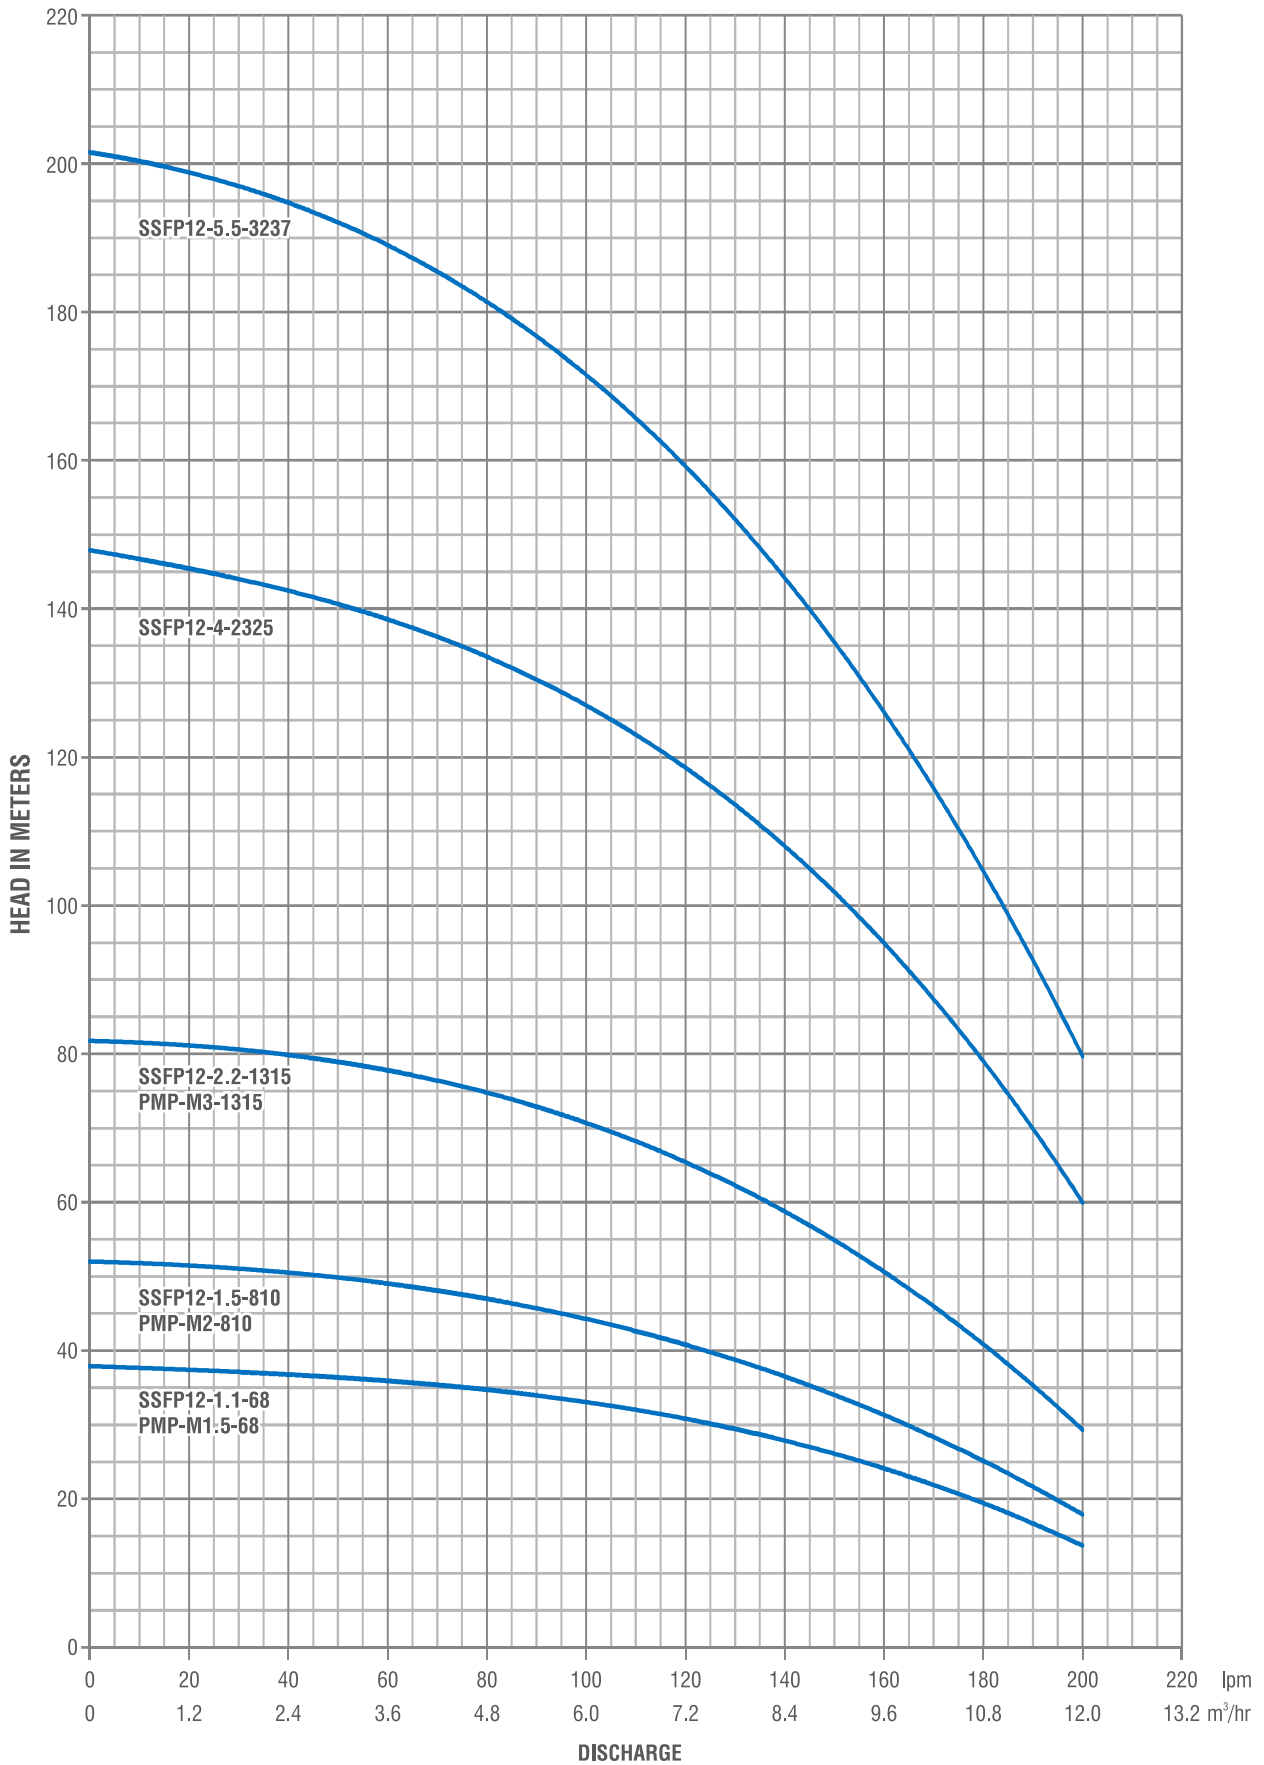


### HYDRAULIC PERFORMANCE CURVE SSFP24-2.2-8 TO SSFP24-5.5-20 50Hz 2900 rpm

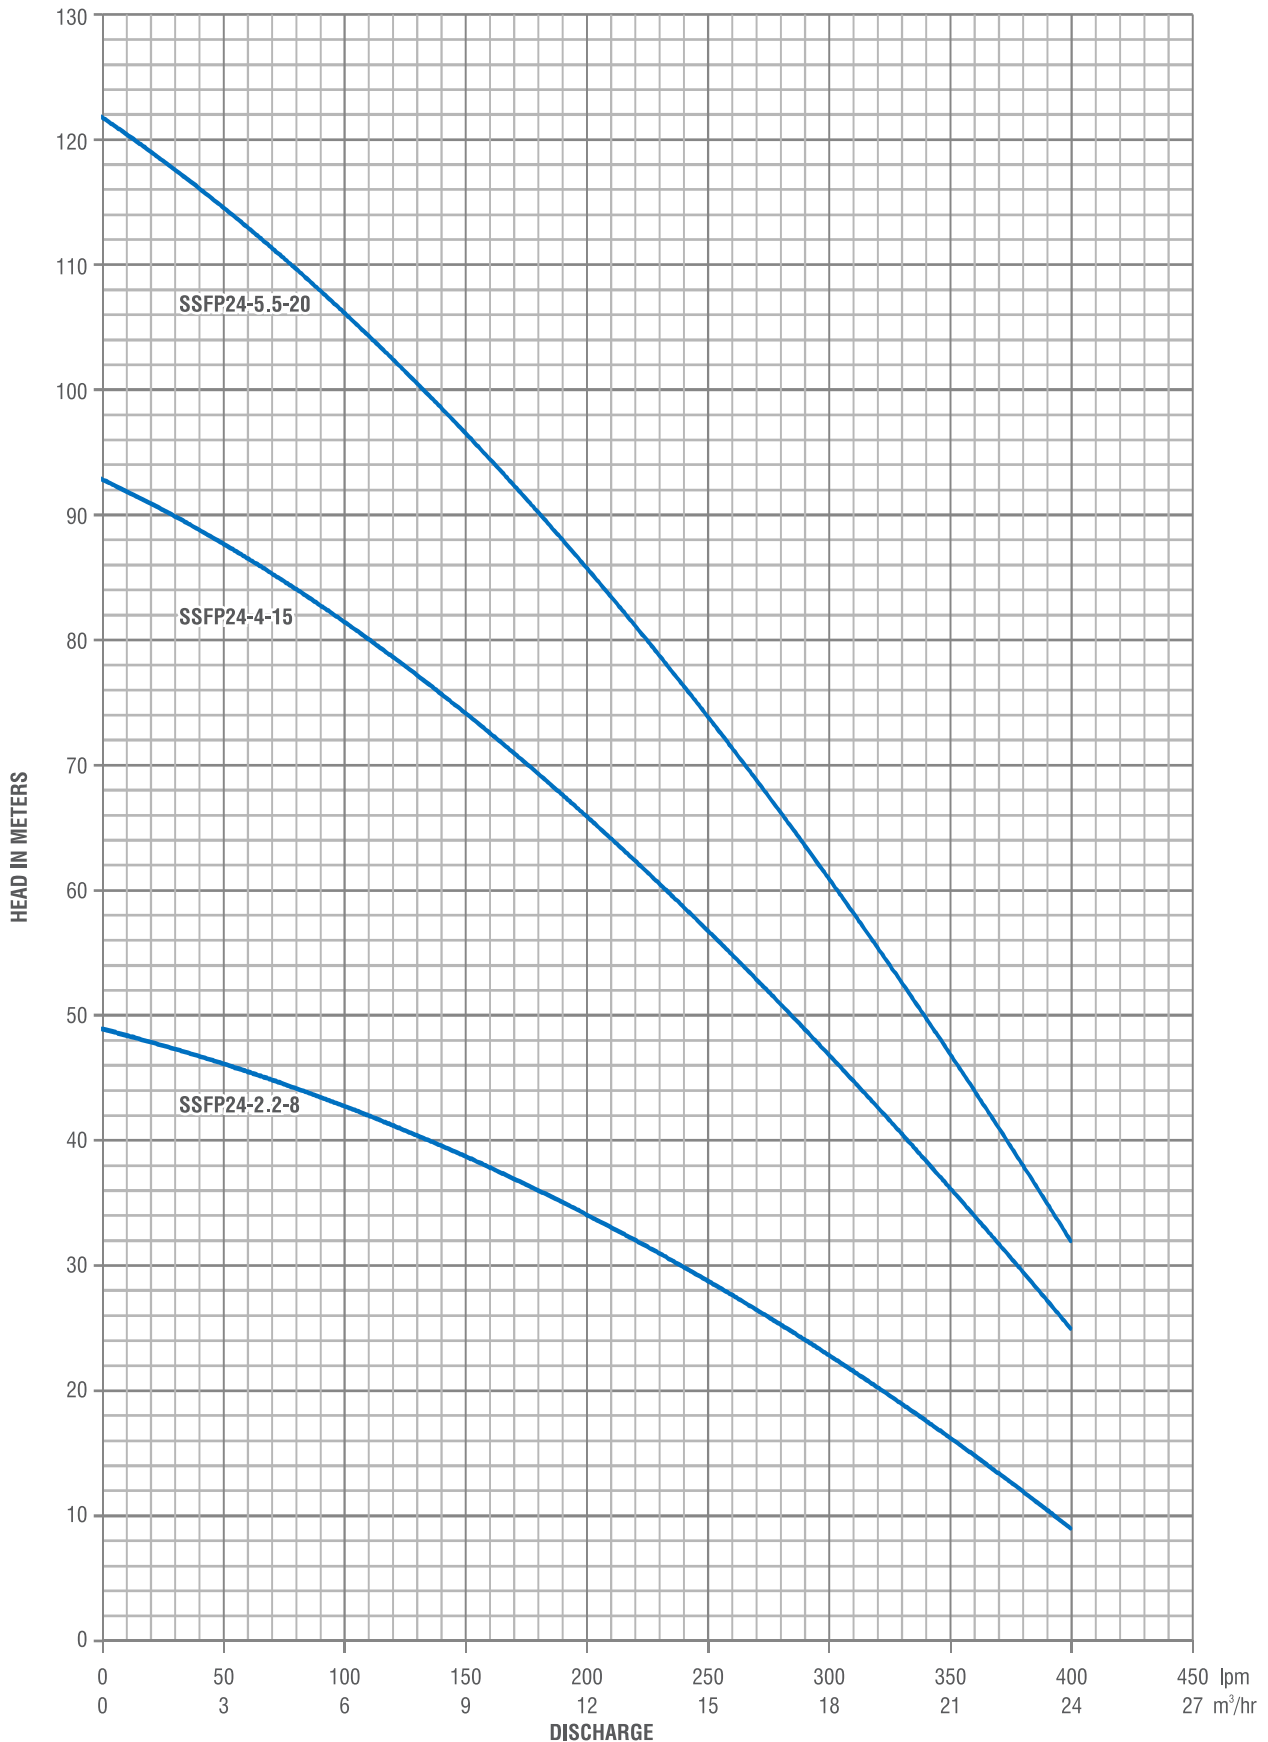



Quality, Reliability, Life

**PRAKASH PUMP**

Survey No. 479, Opp. Supreme Estate-1,  
Zak Kadadara Road, Vill.- Kadadara,  
Tal.- Dehgam, Gandhinagar Gandhinagar,  
GJ 382305 INDIA 

**Distributor Office for Middle East**

**PRAKASH PUMP EST**

P.O.Box: 20973 Industrial Area  
AL Ain, (United Arab Emirates)  
T: +971 3 7222733  
F: +971 3 7222744  
M: +971 50 6731283  
E-mail: sale@prakashpump.com

**Distributor Office for Oman**

**Global Equipment Material Co. LLC**

P.O. Box. 227, Postal Code:320  
Nakhla Road, Barka(Sultanate of Oman)  
T: +968 26883982  
F: +968 26883982  
M: +968 94584686  
E-mail: oman@prakashpump.com



To get quotation by email



To get quotation by SMS



To download e-catalogue



PRAKASHPUMPEST



PRAKASHPUMPEST



PRAKASHPUMPEST



PRAKASHPUMPOFFICIAL

The images given is only for illustration purpose for further details contact to sales team or sale@prakashpump.com / oman@prakashpump.com